

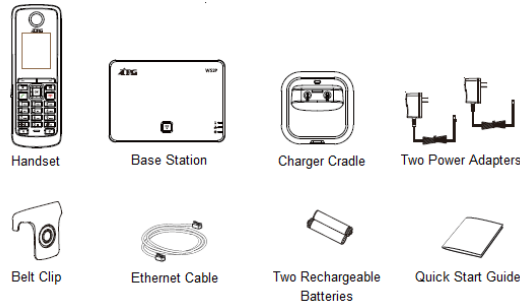
# TPG BizPhone

## IP DECT W52P Quick Startup Guide



### Packaging Contents

The following contents are included in your W52P package:




### Assembling the Phone


1. Connect the network and power for the base station in one of the following ways, as shown below.

a. AC Power Option

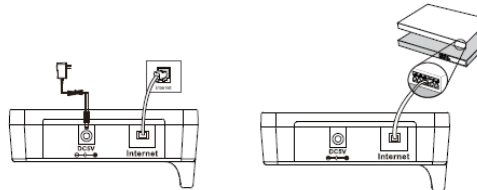
b. PoE (Power over Ethernet) Option




2. Connect the handset and optional headset, as shown below.



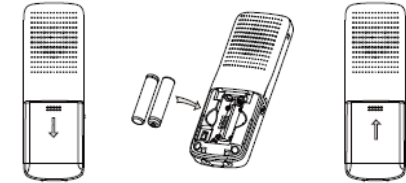3. Insert the battery into the handset, as shown below.



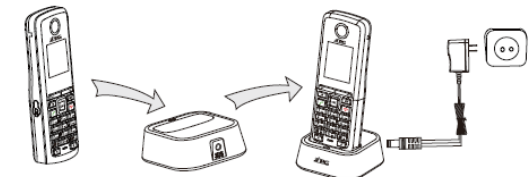4. Charge the handset, as shown below.



The charging status of the handset is indicated in the top right-hand corner of the LCD screen.


### Startup the Phone

The IP Phone is pre-registered to the base station. After the IP Phone is connected to the network and the power, it will automatically start the initialization process by connecting to TPG BizPhone's servers to obtain the configuration and updates (maximum 10 minutes).

The LCD screen will indicate the current status of the process (initializing or configuration updating). The phone may reboot few time during this process. After the final reboot, the phone is ready to use.

## BASIC OPERATIONS

### Turning Handsets On

- Long press  until the LCD screen lights up.
- Place the handset in the charger cradle. The handset will be turned on automatically.

### Turning Handsets Off



- Long press  to turn the handsets off.

## HANDSET SETTINGS







### Add a Contact

- Press the **OK** key to enter the main menu and then select **Directory**.
- Enter the desired values in the **Name**, **Number** and **Mobile** fields.
- Press the **Options** soft key and then select **New Contact**.
- Press the **Save** soft key to accept the change.





### Delete a Contact

- Press the **OK** key to enter the main menu, and then select **Directory**.
- Press  or  to highlight the desired entry.
- Press the **Options** soft key, and then select **Delete** to delete the selected entry.

### Assign a Speed Dial Number


- Press the **OK** key to enter the main menu and then select **Settings** -> **Telephony** -> **Speed Dial**.
- Press  or  to highlight the desired speed dial key and then press the **Assign** soft key.
- Press  or  to highlight the desired entry and then press the **OK** soft key.  
If both the office and mobile numbers are stored, Press  or  to highlight the desired number and then press the **OK** soft key again.

### Volume Adjustment








- Press  or  during a call to adjust the volume of the currently used audio device.
- Press  or  when the handset is idle to adjust the ringer volume.

## BASIC CALL FEATURES

### Placing Calls

- Enter the desired number when the handset is idle, and then press .




### Placing Calls from Local Directory

- Press  when the handset is idle.
- Press  or  to highlight the desired entry, and then press .
- If both the office and mobile number are stored, press  or  to highlight the desired number, and then press  again.



### Placing Calls using the Speed Dial Key

- Long press the Speed Dial key to place a call to the number assigned to it.


### Placing Calls from Call History

- Press the History soft key, and then select the desired Call History list.
- Press  or  to highlight the desired entry, and then press .

### Answering Calls

- Press the **Accept** soft key or press  or press .

### Ending Calls

- Press .

### Call Hold

- Press **Options** soft key during a call, and then select **Hold**.


### Call Resume

- If there is only a call on hold, press the **Resume** soft key.
- If there are two calls on hold, press the **Resume** soft key to resume the current call, press the **Swap** soft key to swap between calls.







### Call Transfer – Blind Transfer

- Press the **Options** soft key during a call, and then select **Transfer**.
- Enter the number you want to transfer the call to.
- Press the **Transfer** soft key.

### Call Transfer – Attended Transfer

- Press the **Options** soft key during a call, and then select **Transfer**.
- Enter the number you want to transfer the call to.
- Press  to dial out.
- Press the **Transfer** soft key after the call is answered

### Call Forward

- Press **OK** key to enter the main menu, and then select **Call Features** -> **Call Forward**.
- Press  or  to highlight the desired line, and then press the **OK** soft key.
- Press  or  to highlight the desired forwarding type (Always/Busy/No Answer), and then press the **OK** soft key.
- Select **Enabled** from the **Status** field.
- Enter the number you want to forward the incoming calls to in the **Target** field.
- Press  or  to select the desired ring time to wait before forwarding (only for No Answer forward) in the **After Ring Time** field.
- Press the **Save** soft key to accept the change.

**NOTE:** For more information about other features, refer to the BizPhone User Reference Guide (contact your Administrator)